

# MAGNITUDE

NEW 55L FLD Flat Level Deck fixed bogie lowbed




## This lowbed will get you there!

- 55 tons capacity (Configuration, GAWR, and tire ratings determine legal payloads)
- Fastest, most versatile hydraulic removable gooseneck in the industry ...  
You can connect or disconnect on uneven ground!
- 18" loaded deck height with 6" ground clearance
- 108" swing radius for easy maneuverability with alternate kingpin location at 89" for local compliance
- Generous 26 ft. clear deck length handles bigger loads for greater hauling versatility
- Boom trough with V-pan in bogie helps you get under bridges
- 7-Position rear ride-height control system with dump valve for greater convenience
- LED lights, strobes, and D-rings are all standard to give you more trailer for your money



Standard dual cam pawl provides additional gooseneck positions

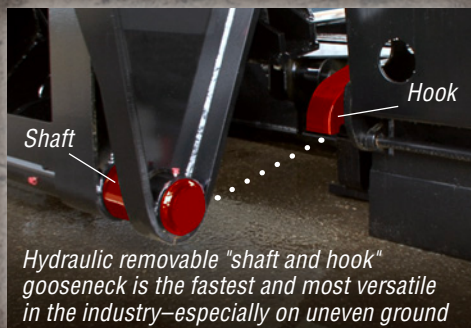

Hydraulic removable "shaft and hook" gooseneck is the fastest and most versatile in the industry—especially on uneven ground



Industry leading 18" deck height with 6" ground clearance

  
**FONTAINE**<sup>®</sup>  
HEAVY-HAUL

[www.fontaineheavyhaul.com](http://www.fontaineheavyhaul.com)

Fontaine Heavy-Haul • 5398 US Highway 11 • Springville, AL 35146 • 205-467-6171


Weights shown are without options • Photos may show some optional equipment • Specifications subject to change without notice



A Marmon/Berkshire Hathaway Company

©2018 Fontaine Heavy-Haul • LT-109 R12 • Jan 2019

# NEW Fontaine Magnitude® 55L FLD Specifications

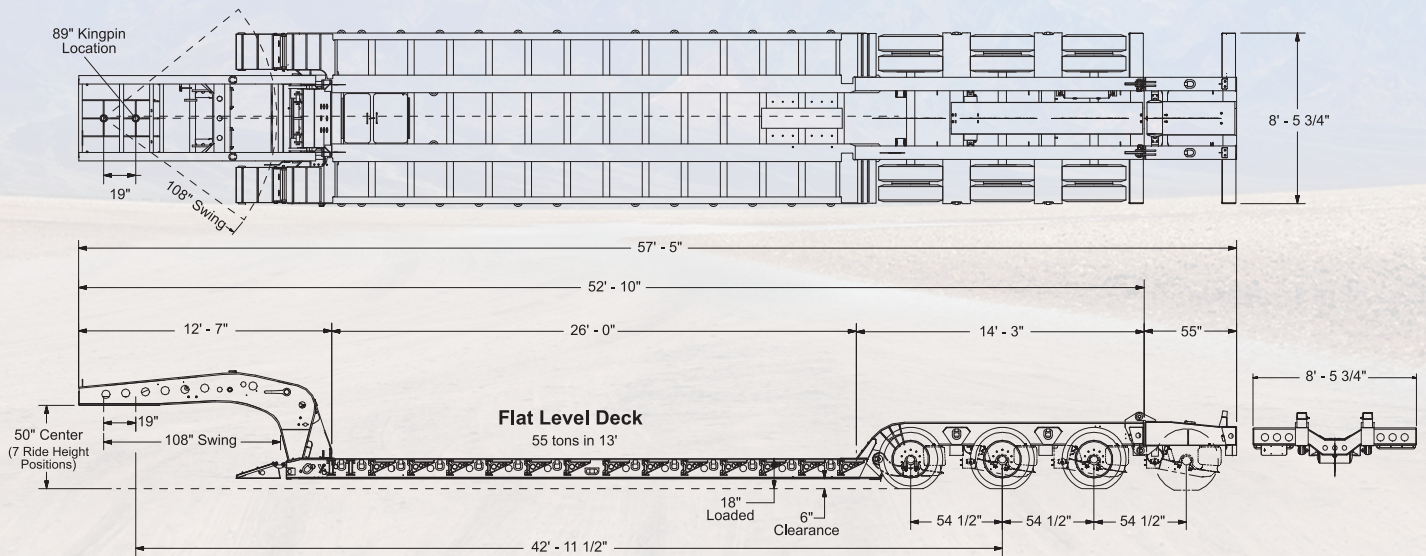

## CAPACITY

- 55 tons in 13 feet (Configuration, GAWR, and tire ratings determine legal payloads)

## MAIN BEAMS

- All main longitudinal members fabricated with 100 KSI minimum yield steel flanges with 50,000 lb. webs

## COMPATIBILITY

- Designed to accept 4th flip axle close couple

## GOOSENECK FEATURES

- Hydraulic removable non-ground bearing
- 7-Position front ride-height adjustments with dual cam pawl for additional options
- 50" loaded fifth wheel height
- 108" swing radius with removable kingpin
- 89" alternate kingpin location
- Set up for wet line operation
- J560 7-pin electrical connector

## DECK FEATURES

- 8' 6" overall width
- 26' clear deck length
- 18" loaded deck height with 6" ground clearance
- 2" apitong flooring on side rails
- Two fully covered tool box trays with lockable covers in front of deck between mainbeams
- Manual front approach ramps standard
- Extension brackets:
  - 13 pair (26 total) removable swing type
  - 2 pair (4 total) heavy-duty removable hook-on type

## DECK FEATURES (continued)

- Front bogie ramps standard
- Recess last three crossmembers in deck
- Fixed deck to bogie connection
- Hammer Plate (16" x 60" x 1/2") installed over recessed crossmembers (perforated plate under hammer plate forming 2 storage areas)

## BOGIE FEATURES

- 3 axle bogie (dust shield option available)
- 25,000 lbs. nominal capacity per axle (GAWR determined by suspension type, brakes, tires and other components)
- Axle spread: 54.5" (between axle centers)
- Recessed load bearing bolsters between all axles and rear of last axle
- Optional load bearing wheel covers
- Unitized air-ride suspension with automatic and manual controls
- Chain lift first axle/Air lift third axle
- 5-Position rear ride-height control system with mechanical control valve (Whittle Style)
- Manual dump valve (Push/Pull)
- V-style boom trough with bolt-in V pan
- Heavy duty V-style rear bumper
- Rear Bogie Height: 40 7/8" to top flange, 36 5/8" to top of bolsters
- Bogie width: 8' 6"

## BRAKES

- 16 1/2" x 7" brakes with 5 1/2" autoslacks
- Heavy-duty brake drums, outboard mount
- Quick change replacement feature
- Automatic slack adjusters

## WHEELS/TIRES

- Wheels: 8.25 x 22.5 steel disc, hub-piloted
- Steel disc wheels (optional wheels available)
- Tires: 275/70R 22.5 OEM Standard

## ELECTRICAL SYSTEM

- Sealed harness for maximum corrosion resistance
- DOT sealed beam with LED lights
- 4" flush mounted, battery powered amber strobes

## PROTECTIVE COATING

- Highest quality 2-part polyurethane enamel fights corrosion to extend the life of your trailer
- Primed for better paint adhesion

## LASH RINGS

- 38 total D-Rings; 16 pair bent type for longer chain life and better securement

## FLAG HOLDERS

- Located at front of deck and on rear bumper

## ESTIMATED EMPTY WEIGHT W/O OPTIONS:

22,040 lbs. ± 3%



Specifications subject to change without notice.  
Photos show some optional equipment.

[www.fontaineheavyhaul.com](http://www.fontaineheavyhaul.com)

Fontaine Heavy-Haul • 5398 US Highway 11 • Springville, AL 35146 • 205-467-6171

Weights shown are without options • Photos may show some optional equipment • Specifications subject to change without notice



A Marron/Berkshire Hathaway Company

©2018 Fontaine Heavy-Haul • LT-109 R12 • Jan 2019