

RENEGADE

LXLN12 hydraulic gooseneck mini-deck lowbed



12 inch loaded deck height

Take your equipment/cargo where others fear to tread

- 30 tons capacity in 16 feet and 30 tons in 20 feet with flip axle (GAWR and tire ratings determine legal payloads)
- 12" loaded deck height with 4" ground clearance
- Fastest, most versatile hydraulic removable gooseneck in the industry ... Connect/disconnect on uneven ground
- Gooseneck dual cam pawl is standard and boasts 7 ride-height positions
- Twin box beam design offers exceptional torsional stability
- Gooseneck tower, gooseneck base and twin box beams all share the same centers for outstanding pulling and tracking capability
- Full width steel crossmembers on 18" centers provide structural reinforcement for added strength and durability
- Generous 32' 11" clear deck length handles bigger loads for greater hauling versatility
- Air-ride suspension with automatic and manual controls
- LED lights, strobes, outriggers and D-rings are all standard to give you more trailer for your money



Hydraulic removable "shaft & hook" gooseneck is the fastest and most versatile in the industry—especially on uneven ground.



Industry leading 12" deck height with 4" ground clearance.

Gooseneck tower, base and twin box beams share same beam centers for outstanding pulling/tracking capability.




Low profile connections for optional 3rd axle give you even greater hauling versatility.

www.fontaineheavyhaul.com

Fontaine Heavy-Haul • 5398 US Highway 11 • Springville, AL 35146 • 205-467-6171

Weights shown are without options • Photos may show some optional equipment • Specifications subject to change without notice

Fontaine Renegade® LXLN12 Mini Deck Specifications

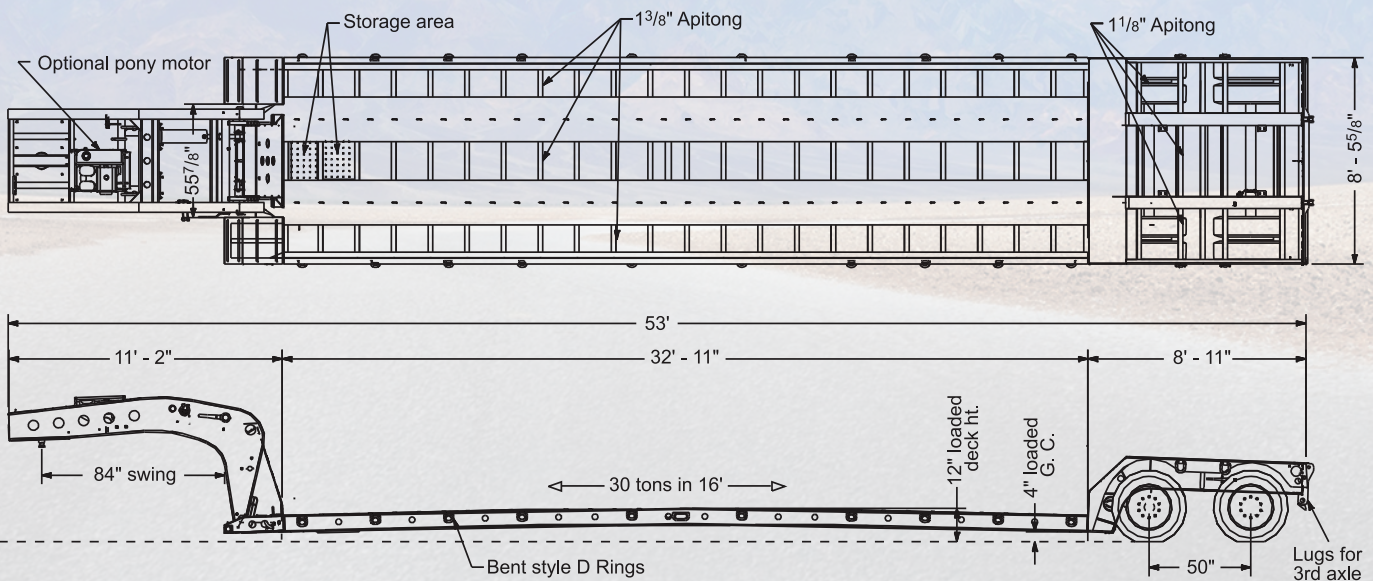

CAPACITY

- 30 tons in 16 feet or 30 tons in 20 feet with flip axle (GAWR and tire ratings determine legal payloads)

MAIN BEAMS

- All main longitudinal members fabricated with 100 KSI minimum yield steel flanges with 50,000 lb. webs

GOOSENECK FEATURES

- Hydraulic removable non-ground bearing
- 7-Position dual cam pawl for ride-height adjustments
- 50" loaded fifth wheel height
- 84" swing radius
- Optional gooseneck platform for greater loading space with 1 1/8" apitong flooring
- Set up for wet line operation
- J560 7-pin electrical connector

DECK FEATURES

- 12" loaded deck height with 4" ground clearance
- Front of deck is sloped and features traction cleats to make loading and unloading easier
- Two perforated metal storage areas in front of deck between mainbeams
- Full-width 1 3/8" apitong flooring
- Crossmembers on 18" centers for greater strength and durability

BOGIE FEATURES

- Covered rear bogie platform with 1 1/8" apitong flooring
- Fixed deck-to-bogie connection with full-width bogie ramp
- Connections for future axle (including air and electrical)

AXLES

- 2 heavy-duty axles with 50" spread
- Air/electrical connections in place for easy third axle connection
- 25,000 lbs. nominal capacity per axle (GAWR determined by suspension type, brakes, tires and other components)
- Tapered spindle axles, automatic slack adjusters and spring brakes

4S/2M ANTILOCK BRAKE SYSTEM

- ABS wired to center pin of 7-way socket
- Electronic sensors at every wheel end
- Virtually eliminates tire flat-spotting

BRAKES

- Spring brakes (2 axles)
- 16 1/2" x 7" with 5 1/2" autoslacks
- Heavy-duty brake drums, outboard mount
- Quick change replacement feature saves repair time
- Automatic slack adjusters maintain positive braking action

HUBS

- Hub-piloted 10-stud mount for increased capacity and durability
- Outboard cast drums save time and cost on brake repairs

WHEELS/TIRES

- Wheels: 8.25 x 22.5 steel disc, hub-piloted
- Steel disc wheels (optional wheels available)
- Tires: 255/70R 22.5 OEM Standard

SUSPENSION

- Unitized air-ride suspension with automatic and manual controls
- Suspension mount is engineered, reinforced and braced to virtually eliminate frame cracking

ELECTRICAL SYSTEM

- Sealed harness for maximum corrosion resistance
- DOT sealed beam with LED lights
- 4" flush mounted, battery powered amber strobes

PROTECTIVE COATING

- Highest quality 2-part polyurethane enamel fights corrosion to extend the life of your trailer
- Shot blasted and cleaned prior to painting
- Primed for better paint adhesion

LASH RINGS

- 12 pair, 24 total

FLAG HOLDERS

- 3 pair (6 total)

ESTIMATED EMPTY WEIGHT W/O OPTIONS:

20,525 lbs. ± 3%



Specifications subject to change without notice.
Photos show some optional equipment.

www.fontaineheavyhaul.com

Fontaine Heavy-Haul • 5398 US Highway 11 • Springville, AL 35146 • 205-467-6171

Weights shown are without options • Photos may show some optional equipment • Specifications subject to change without notice

A Marmon Highway Technologies®/Berkshire Hathaway Company

©2019 Fontaine Heavy-Haul • LT-099 R11 • June 2019