

WORKHORSE™ 55LCC


55LCC • Close coupled • Flat Level Deck (FLD) • Fixed bogie lowbed


FONTAINE®
HEAVY-HAUL



This lowbed will get you there!

- 55 tons capacity (Configuration, GAWR, and tire ratings determine legal payloads)
- Fastest, most versatile hydraulic removable gooseneck in the industry ...
You can connect or disconnect on uneven ground!
- 7-Position gooseneck ride height control for additional up/down clearance at front of deck
- 18" loaded deck height with 6" ground clearance
- 108" swing radius for easy maneuverability with alternate kingpin location at 89" for local compliance
- Generous 26 ft. clear deck length handles bigger loads for greater hauling versatility
- Boom trough with V-pan in bogie helps you get under bridges
- 7-Position mechanical ride height control system and dump valve for added convenience
- LED lights, strobes, and D-rings are all standard to give you more trailer for your money

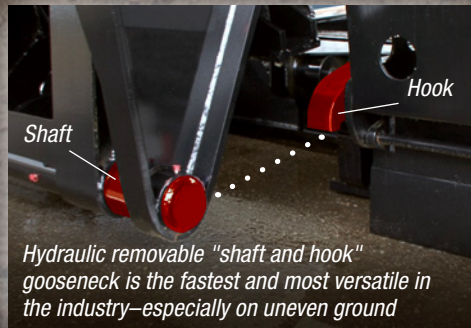


www.fontaineheavyhaul.com

Fontaine Heavy-Haul • 5398 US Highway 11 • Springville, AL 35146 • 205-467-6171

Weights shown are without options • Photos may show some optional equipment • Specifications subject to change without notice

Fontaine Workhorse® 55LCC FLD Specifications

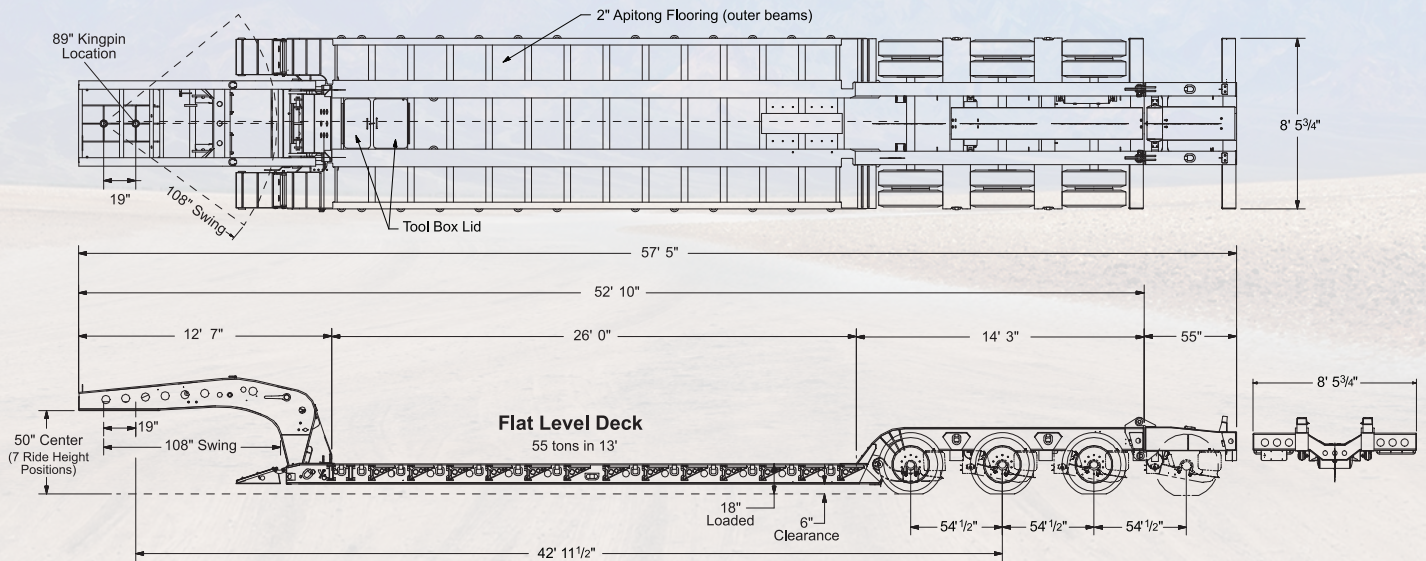

CAPACITY

- 55 tons in 13 feet (Configuration, GAWR, and tire ratings determine legal payloads)

MAIN BEAMS

- All main longitudinal members fabricated with 100 KSI minimum yield steel flanges with 50,000 lb. webs

COMPATIBILITY

- Designed to accept 4th flip axle close couple

GOOSENECK FEATURES

- Hydraulic removable non-ground bearing
- 7-Position front ride-height adjustments with dual cam pawl for additional options
- 50" loaded fifth wheel height
- 108" swing radius with removable kingpin
- 89" alternate kingpin location
- Set up for wet line operation
- J560 7-pin electrical connector

DECK FEATURES

- 8' 6" overall width (9' optional)
- 26' clear deck length (25', 27' optional)
- 18" loaded deck height with 6" ground clearance
- 2" apitong flooring on side rails
- Two fully covered tool box trays with lockable covers in front of deck between mainbeams
- Manual front approach ramps standard
- Extension brackets:
 - 13 pair (26 total) removable swing type
 - 2 pair (4 total) heavy-duty removable hook-on type

DECK FEATURES (continued)

- Front bogie ramps standard
- Recess last three crossmembers in deck
- Hammer Plate installed over recessed crossmembers (perforated plate under hammer plate forming 2 storage areas)
- Fixed deck to bogie connection

BOGIE FEATURES

- 3 axle bogie (dust shield option available)
- 25,000 lbs. nominal capacity per axle (GAWR determined by suspension type, brakes, tires and other components)
- Axle spread: 54.5" between axle centers (60" axle spread optional)
- Recessed load bearing bolsters between all axles and rear of last axle
- Optional load bearing wheel covers
- Air ride suspension with manual dump valve (push/pull)
- Easy to reach 7-position mechanical ride height control
- Chain lift 1st axle, air lift 3rd axle (standard)
- V-style boom trough with bolt-in V pan
- Heavy duty V-style rear bumper
- Rear Bogie Height: 40 7/8" to top flange, 36 5/8" to top of bolsters
- Bogie width: 8' 6"

BRAKES

- 16 1/2" x 7" brakes with 5 1/2" autoslacks
- Heavy-duty brake drums, outboard mount
- Quick change replacement feature
- Automatic slack adjusters

WHEELS/TIRES

- Wheels: 8.25 x 22.5 steel disc, hub-piloted (optional aluminum wheels available)
- Tires: 275/70R 22.5 OEM Standard

ELECTRICAL SYSTEM

- Sealed harness for maximum corrosion resistance
- DOT sealed beam with LED lights
- 4" flush mounted, battery powered amber strobes

PROTECTIVE COATING

- Highest quality 2-part polyurethane enamel fights corrosion to extend the life of your trailer
- Primed for better paint adhesion

LASH RINGS

- 38 total D-Rings; 16 pair bent type for longer chain life and better securement

FLAG HOLDERS

- Located at front of deck and on rear bumper

ESTIMATED EMPTY WEIGHT W/O OPTIONS

22,040 lbs. ± 3%



Specifications subject to change without notice.
Photos show some optional equipment.

www.fontaineheavyhaul.com

Fontaine Heavy-Haul • 5398 US Highway 11 • Springville, AL 35146 • 205-467-6171

Weights shown are without options • Photos may show some optional equipment • Specifications subject to change without notice